


# Wollongong – Product Specification

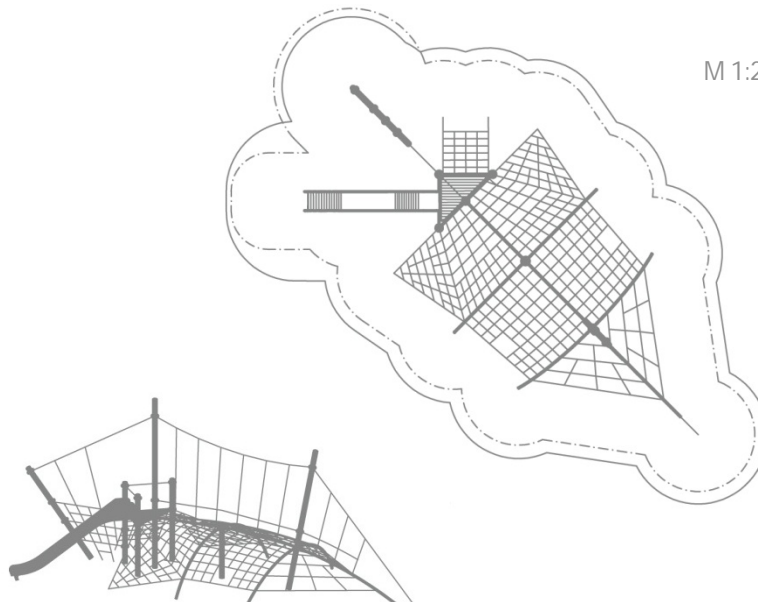

M 1:200

## CombiNation – The clever combination of all play systems

Berliner Seilfabrik offers an endless variety of play systems. But, that's not all:

Since all play equipments consist of the same basic modules, the various play systems can easily be combined with each other.

### Wollongong – At a glance.

|                                          |                                                              |                                        |                           |
|------------------------------------------|--------------------------------------------------------------|----------------------------------------|---------------------------|
| Product Family:                          | <b>CombiNation</b>                                           | Number of Foundations:                 | <b>15 pc.</b>             |
| Item Number:                             | <b>90.190.140</b>                                            | Concrete Volume C20/C25:               | <b>5.42 m<sup>3</sup></b> |
| Children's Age:                          | <b>5+</b>                                                    | Number of skilled installers required: | <b>2</b>                  |
| Fall Height (DIN EN 1176):               | <b>1.54 m (5'-1")</b>                                        | Installation Time without foundation:  | <b>10 hours</b>           |
| Length x Width x Height:                 | <b>5.3 m x 12.9 m x 5.0 m<br/>(19'-4" x 42'-7" x 16'-5")</b> | Dimensions of largest part:            | <b>5.8 m x Ø 0.1 m</b>    |
| Protective Surfacing Area (DIN EN 1176): | <b>16.5 m x 9.1 m</b>                                        | Weight of heaviest part:               | <b>175.74 kg</b>          |
| Protective Surfacing Area (ASTM 1487):   | <b>16.6 m x 9.7 m<br/>(54'-7" x 31'-11")</b>                 | Shipping Volume:                       | <b>Upon request</b>       |
| Minimum space required DIN EN 1176:      | <b>99.7 m<sup>2</sup></b>                                    | Spare part guarantee:                  | <b>Lifelong</b>           |
| Minimum space required ASTM 1487:        | <b>111.9 m<sup>2</sup></b>                                   |                                        |                           |

## Technical Data.

The following text can also be used for tenders.

### Ropes:

U-Rope®-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene); rope-diameter Ø 16 mm (5/8")

### Posts:

Steel pipes Ø 133 mm (5 ¼"); wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

### Terranos clamps:

Two-part cast aluminum connecting clamps for the height-adjustable connection of rope elements or steel pipes to Terranos steel posts; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

### Planar Nets:

Rope Ø 16 mm (5/8"); mesh size minimum 250 x 250 mm (9-4/5"); rope crossing points localized by durable, drop forged aluminum ballknots (no plastic)

### Platform:

HPL-platform; thickness 19 mm (3/4"); connected to steel pipes with cast aluminum panel clamps

### Straight box slide:

Straight box slide made of stainless steel; the cheeks are welded with stainless steel handrails; afterwards smoothed and polished

