

HodgePodge

O'Tannebaum 3.1 Product Specifications



















Published: May 2021


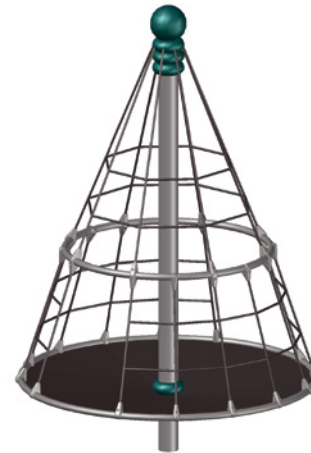
O'Tannebaum 3.1

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities. A calisthenics system for sport activity, climbing trees, Wasps' nest, zip lines, swings and carousels for fun and excitement.

A Christmas tree for all year round. Except for the trunk the entire tree is rotatable. The big rubber membrane surface with its low access height enables children with special needs also to join the fun.

90.340.097

 Product Family	HodgePodge
 Length x Width x Height (m) Length x Width x Height ("'-")	2,07 x 2,07 x 3,10 6-10 x 6-10 x 10-3
 Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("'-")	5,05 x 5,05 5,71 x 5,71 18-9 x 18-9
 Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("'-")	0,5 1-8
 Age	2-12
 Minimum Space required acc. to DIN EN 1176 (m ²) Minimum Space required acc. to ASTM 1487 (ft ²)	20.03 275.56
 Number of Foundations	1
 Concrete Volume C20/C25 (ft ³)	42.4
 Number of skilled Installers required	3
 Installation Time without Foundation	6 hours
 Dimensions of largest Part ("'-")	Ø 0-1 x 15-1
 Weight of heaviest Part (lbs)	203
 Shipping Volume (ft ³)	60
 Total Weight (lbs)	On request
 Spare Part Guarantee	Lifelong
 Certified acc. to EN 1176	Z2 010 256 0286



Technical Data

Technical changes are reserved. The following text can also be used for tenders.

Central Mast:

The central mast with rotating, conical climbing net and top ball made of aluminum consists of a steel tube with a diameter of Ø 5 ¼" and a wall thickness of ¼". It is thermally galvanized to protect against corrosion and powder-coated with a solvent-free epoxy-polyester-process.

Tubes:

Bent steel tubes with a diameter of Ø 2 ¾" and a wall thickness of ¼", sand-blasted, spray galvanized and powder-coated in a solvent-free epoxy-polyester-process to protect against corrosion.

Ball:

The Frameworx® aluminum ball with a diameter of Ø 9 ⅜" is sandblasted and powder-coated solvent-free to protect against corrosion.

Terranos Clamps:

The two-part Terranos® aluminum clamps are used in conjunction with the Frox connection for the height-adjustable connection of the ropes to the steel posts. When connecting stainless steel chains and steel posts, the clamps with Chrox connection are used.

Ropes:

U-Rope®-round strand ropes with galvanized steel cores and a diameter of Ø ¾". The external strands are covered with high abrasion-resistant and UV-resistant polyester-yarn (no polypropylene).

Planar Nets:

The planar nets are permanently localized at the rope crossing points by durable drop-forged aluminum balls (no plastic) and with aluminum pipe clamps attached to the scaffolding.

Rubber Membrane:

The rubber membrane is made of durable and vandal-proof conveyor belt.