


# Swingo.03 – Product Specification

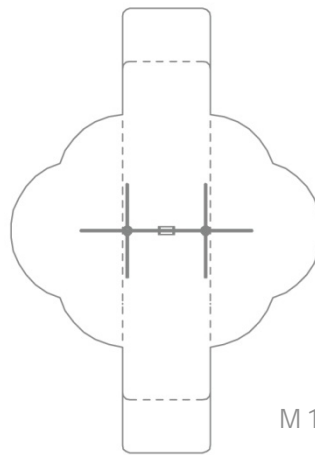

M 1:200

## HodgePodge – A variety of study and durable sport and play elements

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities.

Climbing trees, a Wasp's nest, Volleyball nets for sporting activities, cable rides for fun and excitement.

### Swingo.03 - At a glance.

Product Family:	<b>HodgePodge</b>	Number of Foundations:	<b>6 pc.</b>
Item Number:	<b>90.160.150</b>	Concrete Volume C20/C25:	<b>0.8 m<sup>3</sup> (26.5 ft<sup>3</sup>)</b>
Children's Age:	<b>3+</b>	Number of skilled installers required:	<b>2</b>
Fall Height (DIN EN 1176):	<b>1.65 m (5'-5")</b>	Installation Time without foundation:	<b>5 hours</b>
Length x Width x Height:	<b>4.6 m x 2.5 m x 3.1 m</b> <b>(14'-11" x 8'-2" x 10'-0")</b>	Dimensions of largest part:	<b>Ø 0.1 m x 4.1 m</b> <b>(Ø 1/5" x 13'-4")</b>
Protective Surfacing Area (DIN EN 1176):	<b>2.4 m x 8.9 m</b>	Weight of heaviest part:	<b>24 kg (52 lbs)</b>
Protective Surfacing Area (ASTM 1487):	<b>8.2 m x 11.7 m</b> <b>(26'-11" x 38'-5")</b>	Shipping Volume:	<b>0.7 m<sup>3</sup> (24.7 ft<sup>3</sup>)</b>
Minimum space required DIN EN 1176:	<b>20.5 m<sup>2</sup></b>	Spare part guarantee:	<b>Lifelong</b>
Minimum space required ASTM 1487:	<b>51.4 m<sup>2</sup> (533.3 sf)</b>	Certificate according to EN 1176	<b>No.: Z2.16.01.10256.259</b> <b>TÜV Product Service</b>

## Technical Data.

The following text can also be used for tenders.

### Tube framework:

Steel tubes; Ø 60.3 mm (2-3/8"); anticorrosion treatment and color finish: anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

### Swing seat

The durable black ebonite seat is hanging on a stainless steel chain with pivot bearings fixed to the horizontal pipe in maintenance-free PA-bushes

### Nodes:

Framework-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTM TT net tensioning system; securely closed with durable EPDM- caps