

VIP Swing – Product Specification



HodgePodge – A variety of study and durable sport and play elements



HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities.

Climbing trees, a Wasp's nest, Volleyball nets for sporting activities, cable rides for fun and excitement.

VIP Swing – At a glance.

Product Family:	HodgePodge	Number of Foundations:	2
Item Number:	97.100.026	Concrete Volume C20/C25:	1.4 m³
Children's Age:	5+	Number of skilled installers required:	2
Fall Height (DIN EN 1176):	2.20 m (7'-3")	Installation Time without foundation:	3 hours
Length x Width x Height:	4.7 m x 2.0 m x 3.5 m (15'-4" x 6'-7" x 11'-6")	Dimensions of largest part:	Ø 0.1 m x 4.5 m (Ø 0'-4" x 14'-9")
Protective Surfacing Area (DIN EN 1176):	7.7 m x 9.2 m	Weight of heaviest part:	175 kg (385 lbs)
Protective Surfacing Area (ASTM 1487):	8.4 m x 9.8 m (27'-5" x 32'-2")	Shipping Volume:	0.7 m³ (24.7 ft³)
Minimum space required DIN EN 1176:	53.6 m²	Spare part guarantee:	Lifelong
Minimum space required ASTM 1487:	62.6 m² (673.8 sf)	Certificate according to EN 1176:	No.: Z2.16.01.10256.259 TÜV Product Service

VIP Swing – Product Specification

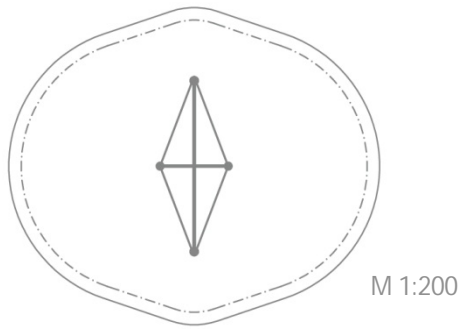

Technical Data.

The following text can also be used for tenders.

Steel posts Jan:

Steel pipes \varnothing 133 mm (5 1/4") with rounded cast aluminum post top, minimum wall thickness 7,1mm (1/4"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process.

Terranos clamps:

Two-part cast aluminum connecting clamps for the height-adjustable connection of rope elements or steel pipes to Terranos steel posts.

Ropes:

U-Rope-round strand ropes with steel cores, \varnothing 16mm (5/8") – unless otherwise noted ; with galvanized wires, external strands covered; with non-abrasive UV-resistant Polyester-yarn.

Spreader bar:

1 Framworx-304 stainless steel pipe, \varnothing 60.3 mm (2 3/8");

Steel pipe:

1 Framworx-steel pipe, \varnothing 60.3 mm (2 3/8"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process.

Nodes:

2 Framworx-aluminum ball connectors, \varnothing 200mm (7-7/8"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process; securely closed with durable ebonite caps.

