


## Swingo.2.3 – Product Specification



**Swingo.2.3**  
The bigger one-bay-swing takes a child to new heights. In order to sustain the increased dynamics, the structure is supported by tripods.

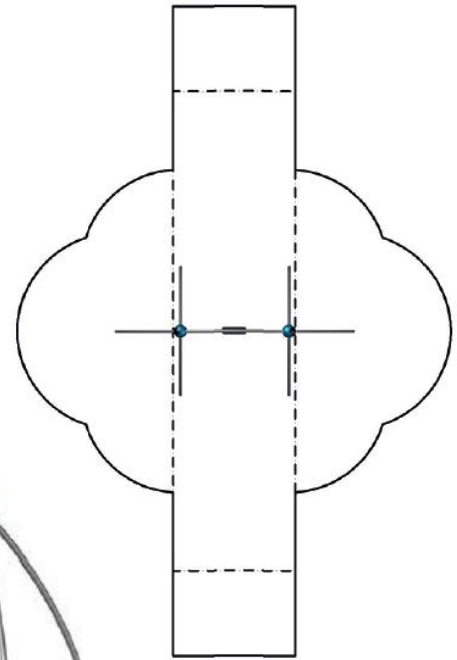

### Swingo.2.3 – at a glance.

Product Family:	<b>Playpoints</b>	Number of Foundations:	<b>6 pc.</b>
Item Number:	<b>90.260.503</b>	Concrete Volume C20/C25:	<b>0.9 m<sup>3</sup> (32 ft<sup>3</sup>)</b>
Children's Age:	<b>3+</b>	Number of skilled installers required:	<b>2</b>
Fall Height (DIN EN 1176):	<b>1.8 m (5'-11")</b>	Installation Time without foundation:	<b>2 hours</b>
Length x Width x Height:	<b>4.6 m x 2.5 m x 3.2 m</b> <b>(15'-2" x 8'-3" x 10'-6")</b>	Dimensions of largest part:	<b>3.8 m x 1.2 m x 0.1 m</b> <b>(12'-6" x 4'-0" x 0'-4")</b>
Protective Surfacing Area (DIN EN 1176):	<b>9.1 m x 2.4 m</b>	Weight of the heaviest part:	<b>25 kg (56 lbs)</b>
Protective Surfacing Area (ASTM 1487):	<b>12.3 m x 8.2 m</b> <b>(40'-5" x 26'-11")</b>	Shipping Volume:	<b>2.3 m<sup>3</sup> (82 ft<sup>3</sup>)</b>
Minimum space required DIN EN 1176:	<b>21.2 m<sup>2</sup></b>	Shipping Weight:	<b>160 kg (353 lbs)</b>
Minimum space required ASTM 1487:	<b>53.0 m<sup>2</sup> (571 ft<sup>2</sup>)</b>	Spare part guarantee:	<b>Lifelong</b>
		Certificate according to DIN EN 1176:	<b>No.: Z2 15 06 10256 231</b> <b>TÜV Product Service</b>

### Technical Data.

The following text can also be used for tenders.

#### Framework:

Stainless steel tube bends  $\varnothing$  60.3 mm (2 3/8"), connected to Framework®-aluminum ball connectors;  $\varnothing$  250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM-caps

#### Swing seat:

The black rubber safety swing seat is by stainless steel chains rotatable mounted to the cross tube mounted in maintenance free nylon bushes

