



## Swingo.2.4 – Product Specification

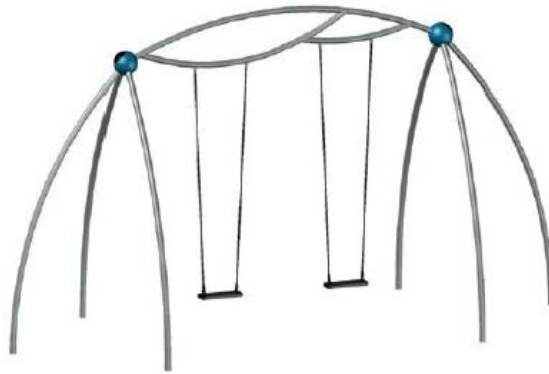

### Swingo.2.4

The large two-bay-version of the Swingo combines asymmetry and high-flying-dynamics. Cool game – cool look!

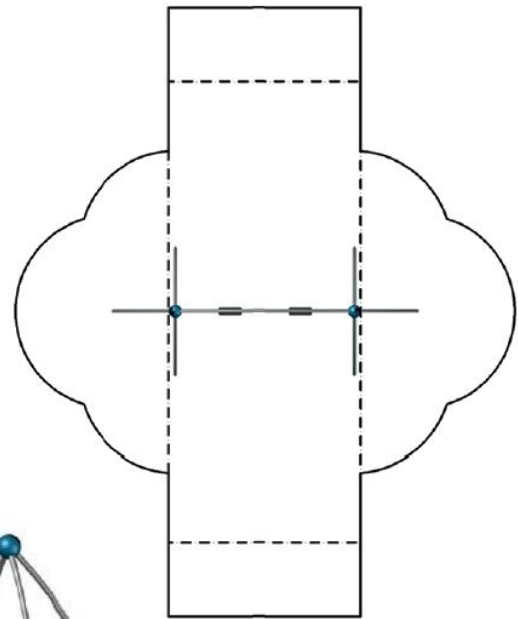

### Swingo.2.4 – at a glance.

Product Family:	<b>Playpoints</b>	Number of Foundations:	<b>6 pc.</b>
Item Number:	<b>90.260.504</b>	Concrete Volume C20/C25:	<b>0.9 m<sup>3</sup> (32 ft<sup>3</sup>)</b>
Children's Age:	<b>3+</b>	Number of skilled installers required:	<b>2</b>
Fall Height (DIN EN 1176):	<b>1.7 m (5'-7")</b>	Installation Time without foundation:	<b>2 hours</b>
Length x Width x Height:	<b>5.9 m x 2.5 m x 3.4 m (19'-5" x 8'-3" x 11'-2")</b>	Dimensions of largest part:	<b>3.8 m x 1.2 m x 0.1 m (12'-6" x 4'-0" x 0'-4")</b>
Protective Surfacing Area (DIN EN 1176):	<b>8.9 m x 3.7 m</b>	Weight of the heaviest part:	<b>35 kg (78 lbs)</b>
Protective Surfacing Area (ASTM 1487):	<b>11.6 m x 9.6 m (38'-1" x 31'-6")</b>	Shipping Volume:	<b>1.7 m<sup>3</sup> (61 ft<sup>3</sup>)</b>
Minimum space required DIN EN 1176:	<b>32.2 m<sup>2</sup></b>	Shipping Weight:	<b>185 kg (408 lbs)</b>
Minimum space required ASTM 1487:	<b>66.9 m<sup>2</sup> (721 ft<sup>2</sup>)</b>	Spare part guarantee:	<b>Lifelong</b>
		Certificate according to DIN EN 1176:	<b>No.: Z2 15 06 10256 231 TÜV Product Service</b>

### Technical Data.

The following text can also be used for tenders.

#### Framework:

Stainless steel tube bends Ø 60.3 mm (2 3/8"), connected to Framework®-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM-caps

#### Swing seat:

The black rubber safety swing seat is by stainless steel chains rotatable mounted to the cross tube mounted in maintenance free nylon bushes

