



Windrider – Product Specification

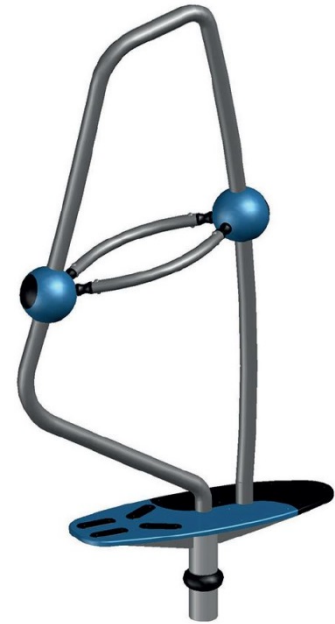

Windrider

A surfboard for the pedestrian zone!
This innovative playpoint joins in every movement, no matter where the wind comes from.
Further more the windrider is a visual enrichment for any kind of urban spaces.



i Needs no safety surface.

Windrider – at a glance.

Product Family:	Playpoints	Number of Foundations:	1 pc.
Item Number:	NSP.127	Concrete Volume C20/C25:	0.5 m³ (18 ft³)
Children's Age:	3+	Number of skilled installers required:	2
Fall Height (DIN EN 1176):	0.4 m (1'-4")	Installation Time without foundation:	2 hours
Length x Width x Height:	0.38 m x 1.23m x 2.29 m (1'-3" x 4'-1" x 7'-7")	Dimensions of largest part:	1.8 m x 0.4 m x 0.9 m (5'-11" x 1'-4" x 3'-0")
Protective Surfacing Area (DIN EN 1176):	3.67 m x 4.30 m	Weight of the heaviest part:	40 kg (89 lbs)
Protective Surfacing Area (ASTM 1487):	4.33 m x 4.96 m (14'-3" x 16'-4")	Shipping Volume:	upon request
Minimum space required DIN EN 1176:	12.7 m²	Shipping Weight:	upon request
Minimum space required ASTM 1487:	14.8 m² (160 ft²)	Spare part guarantee:	Lifelong

Technical Data.

The following text can also be used for tenders.

Tubes:

Stainless steel tubes, Ø 60.3 mm (2 3/8") connected to a Frameworx®-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM-caps. Grab handles made of stainless steel tubes, Ø 40 mm (1 1/2"), movably mounted with Boge Powerjoints

Luffing mechanism:

Fully encapsulated rubber-metal-bearing integrated in stainless steel foundation tube

Base plate:

Base plate made of HDPE panels with 19 mm (3/4") thickness

